Etuyeuse

Fabricant : Tinarelli
Modèle : TVR 60 A
Année : 2015
Type : verticale
Pour flacons / pots ou autre, via manipulateur de chargement
Cadence max : 32 CPM
Plage de formats étuis :

- A : de 44 à 120 mm
- B : de 30 à 100 mm
- C : de 70 à 180 mm
- A + B MAX 200

10 formats pré-réglés (voir photos pour détail)
Automate : Omron Sysmac
Conforme normes CE
Documentation technique : disponible, détails sur demande

Etuyeuse comprenant :

- Un poste de chargement des étuis à plat
- Un poste de chargement des cales (optionnel)
- Un poste dégodiseur flacon/godet (sans convoyeur à godets)
- Un poste « opérateur »
- Un poste de sortie étui plein avec retourneur

Incoterm : FCA

Cartoner

Manufacturer: Tinarelli
Model: TVR 60 A
Year: 2015
Type: vertical
For vials / pots or others, with loading handler
Max speed: 32 CPM
Carton's format range:

- *A : 44 to 120 mm*
- *B : 30 to 100 mm*
- *C : 70 to 180 mm*
- *A + B MAX 200*

10 formats pre-ajusted (see pictures for detail)
PLC: Omron Sysmac
EC standards' compliant
Technical documentation: available, details on request

Cartoner including:

- *A station for the loading of flat cartons*
- *A station for the loading of chocks (optional)*
- *A vial unloader vial/cup (without cups' conveyor)*
- *An "operator" station*
- *A "full carton's outfeed" station with unscrambler*

Incoterm: FCA

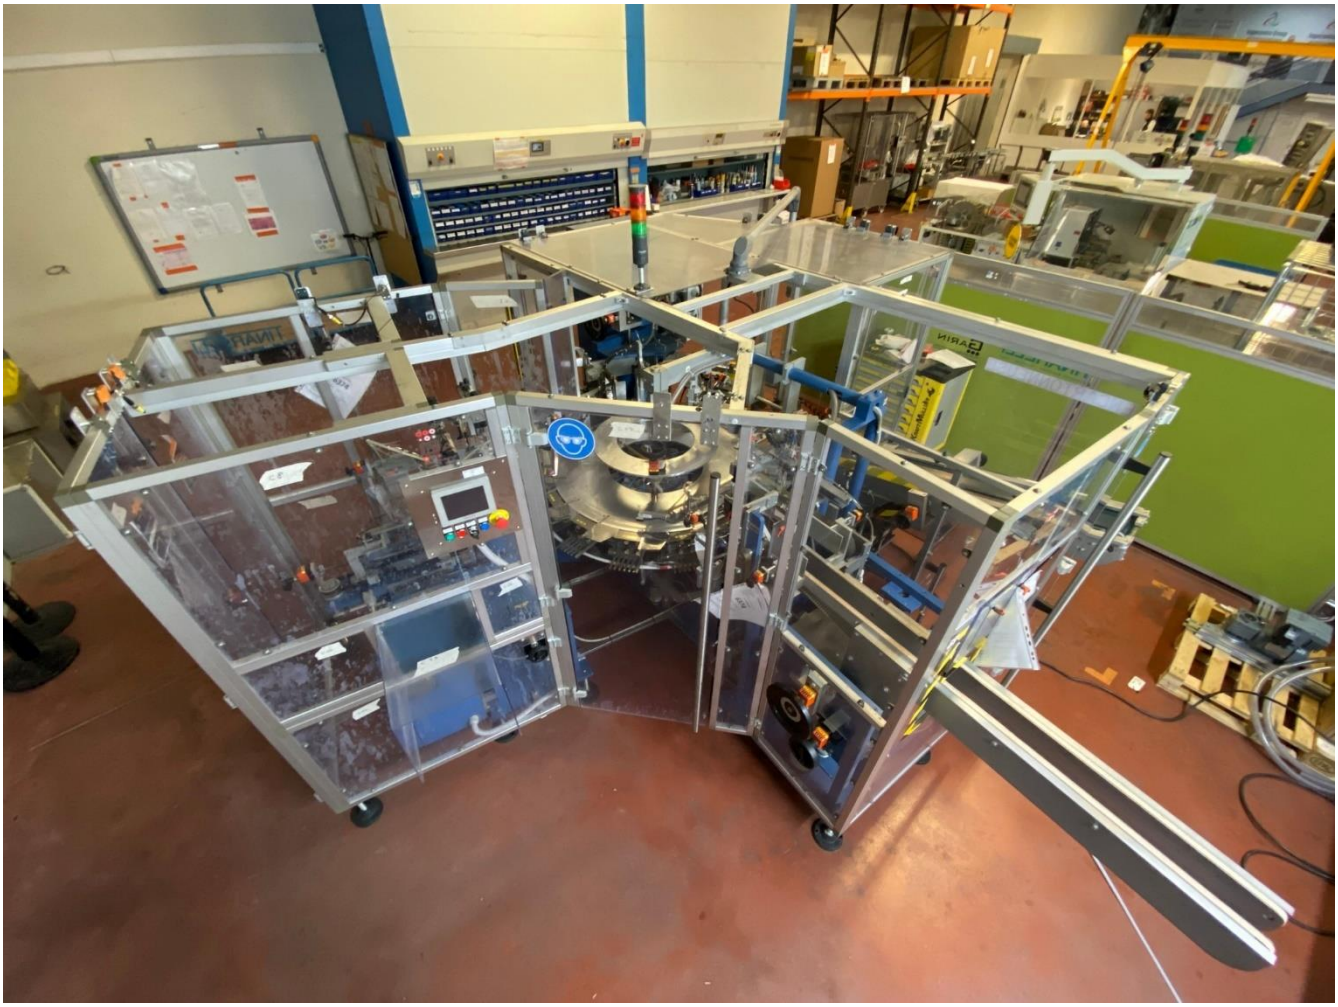

TINARELLI
ARTONNEUSE

POWER
G101
MD212
OUT
MCPWR
BUSY
EtherNet/IP
NC
NC

PA202
POWER
G101
MD212
No.1
No.0
IN
OUT
OMRON
SYSMAC
CJ2M
CPU31
PROGRAMMABLE
CONTROLLER
RUN
ERR/ALM
INH
PRPHL
BKUP
OPEN
MCPWR
BUSY
EtherNet/IP

K300
V1000

GARIN
PACKAGING MACHINES
GARIN Sarl
37 rue Dinetard
45560 SAINT DENIS EN VAL
FRANCE
Tél : 00 33 (0) 966 961 576
Fax : 00 33 (0) 238 491 576
Mail : contact@garin-pierre.fr
Site internet : www.garin-pierre.fr
TINARELLI s.r.l.
CE
Via Balzani 13 - 40069 Zola Predosa (BO) - Italy Tel +39 051751400 Fax +39 051759200
Email : info@tinarellisrl.com - Website : www.tinarellisrl.com
MACHINE MODEL
TVR60A
SERIAL NUMBER
738
YEAR
2015
WEIGHT KG
1800
POWER INSTALLED Kw
8.0
VOLTS
400 + N
Hz
50

4730
V
TINARELLI
ETUIS
298
0
14
ONDULE
PICK
PLACE
AXIAL
Coup par coup
Pro-face
MARCHE
ARRÊT ALARM
ENABLE MARCHE
NON OUI
RESET
EMERGENCY
Schneider Electric

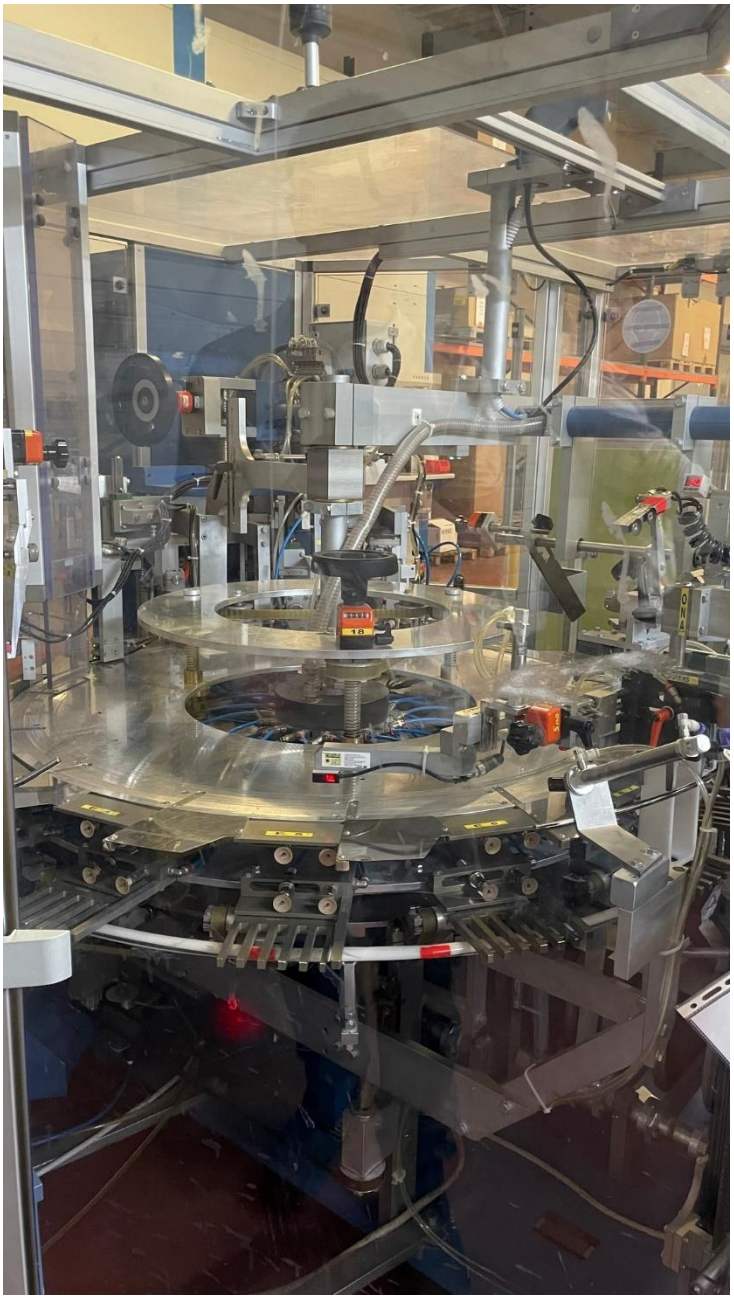
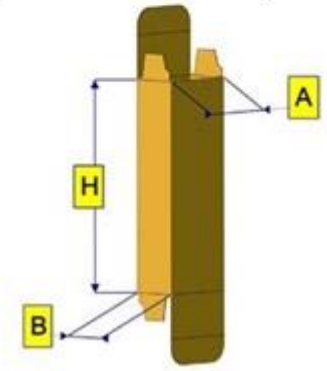
Format	H	A	B
1	103	45,5	45,5
2	127,2	55,5	55,5
3	139,4	62	62
4	134	62	62
5	92,8	59,9	45,9
6	100,8	67,3	46,2
7	114,5	81,5	55,5
8	107	61,5	30,5
9	115,5	69	34
10	138,5	83	41