



packaging machinery



Sollas Holland B.V.

Bruynvisweg 1 | 1531 AX Wormer | P.O. Box 31 | 1520 AA Wormerveer | The Netherlands
T +31 75 628 47 51 | F +31 75 628 02 66 | E contact@sollas.com

Branch offices

Sollas France

12 Rue Soddy | 94000 Créteil | France
T +33 141 941 150 | F +33 141 941 159 | E sollas@sollasfrance.com

Sollas Pokapak

Kränkelsweg 4 | D-41748 Viersen | Postfach 101041 | D-41710 Viersen | Germany
T +49 216 232 066 | F +49 216 232 068 | E info@sollas.de

Sollas UK

Unit 12 | Ardglan Industrial Estate | Whitchurch, RG28 7BB Hampshire | United Kingdom
T +44 1256 896 930 | F +44 1256 896 665 | E sales@sollasuk.com

Agents and distributors worldwide

www.sollas.com

SOLLAS 20


Sollas packaging machinery is well-known worldwide for its excellent packaging quality, at realistic prices. Continual innovation, together with the constant introduction of improved technology maintains the high standards that are demanded by Sollas.

Sollas machinery is used in a wide range of industries such as perfumes/cosmetics, pharmaceuticals, stationery, cards, digital-media, tea/coffee, confectionery and foods. The machines, which are compact in their design, are easily adjusted to accommodate a wide range of product-sizes.

The SOLLAS 20 is a versatile overwrapping machine that can be supplied with various feeding systems. The machine has proven itself at thousands of satisfied customers worldwide. The products can be wrapped either as single packs or in bundles. Due to its flexibility and easy operation, the Sollas 20 is a well-known machine in the industry.

- Entry level machine, competitively priced
- Highly reliable cam driven technology
- One level product infeed and outfeed
- Electronically adjustable machine speed
- Realistically priced change-parts
- Change parts from Sollas 17, 19 and S-series are compatible
- Trailing edge seal system
- Quick change-over facility
- Flexible size-ranges
- Easy operation and maintenance

All Sollas machines can be equipped with a variety of infeed and outfeed systems (feeders, collators, turning, tilting). Integration is also possible with upstream and/or downstream equipment i.e. case-packing, cartoning, stacking, banding and personalising.

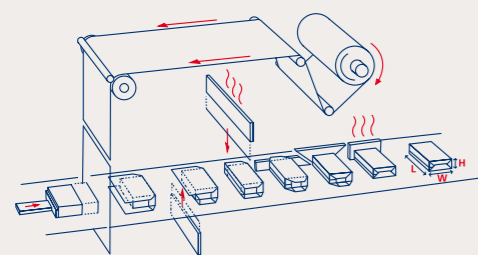

Type	20
packaging style	overwrapping/banding
product size range (L x W x H)	
L	45 - 300 mm
W	40 - 200 mm
H	16 - 96 mm
products outside this range on request	
output max. ¹	50 / minute
size change time ²	10 - 20 minutes
film width	50 - 420 mm
filmroll diameter max.	320 mm
packaging material ³	PP / coated paper (≥20 micron)
machine lay out	HL / HR / LL / LR
air consumption	4 ndm ³ / stroke
air pressure	6 Bar
power consumption	2,5 kW
machine weight (net)	950 kg
machine dimension	see drawing
machine color	RAL 9010
options	teartape applicator, printmark registration, film slitting, castors, special color, various infeed systems, felt on machine, universal folding system
drive	cam / servo
control	PLC

¹ depending on product, machine design and packaging material

² depending on product and machine design

³ depending on quality of packaging material

